



Rapid 12LN CNC 408/510

RAPID 510-12LN

high flexibility and
productivity cnc router
for furniture production



Castaly's Woodworking
CNC Machine are
perfect for:

- ❖ Three-dimensional wood processing
- ❖ Cupboard doors
- ❖ Wooden doors
- ❖ Window processing
- ❖ Video game cabinets
- ❖ Furniture processing
- ❖ Plastic processing
- ❖ Wood and plastic engraving



CASTALY INDUSTRIES CORP.

637 VINELAND AVE, LA PUENTE, CA 91746

TEL: 626-968-6330 FAX: 626-968-6333

E-mail: maxcnc@castalymachine.com Website: www.castaly-cncmachine.com



General Information

FOB L.A. California, USA		408: \$43,300 USD/ 510: \$46,600 USD
Payment Terms Warranty Delivery time	Tooling, rigging, freight & sales taxes are not included	
	50% deposit, 50% balance before ship	
	One year	
General specs		To confirm with sales 1. Machine Gantry X Axis square rails Parallel vertical accuracy 0.001" (0.03mm) 2. Y Axis square rails Parallel vertical accuracy 0.001" (0.03mm) 3. Z Axis ball screw Parallel vertical accuracy 0.001" (0.03mm) 4. Machine Re-position accuracy 0.001" (0.02mm) 5. Machine working accuracy 0.004" (0.10mm) 6. Grating ruler travel accuracy 0.002" (0.05mm)

Features

- ❖ Automatic 12 Tools linear type auto tool changer under the bridge for increased productivity.
- ❖ All "servo motor" driving system: All axes are driven by brush-less type, high torque AC servo motors.
- ❖ DSP CNC controller is setup to accept standard G-code programming formats along with on board conversational applications.
- ❖ Optional CAD/CAM system can create and edit part programs then send to machine for easy cutting. DXF files can be imported, modified and edited from here to create a G-code.
- ❖ DNC is no longer required as the PC directly stores all part programs in a text editable file.
- ❖ Machine designed ready for 3-D cutting usage and superior performance.
- ❖ Moving gantry construction for space saving.
- ❖ The rigid steel frame construction has been stress relieved prior to finish machining to provide repeat-ability and accuracy.
- ❖ Automatic frequency brake for the spindle allows rapid deceleration resulting in faster tool changes.
- ❖ Linear guides and sliding blocks are pre-loaded with recirculation bearings to ensure maximum rapid traverse and precision.
- ❖ The X & Y axis are equipped with a precision rack & pinion driving system. The Z axis utilizes a ball screw assembly complete with the pre-loaded and ground screw for long life and optimum accuracy.



CASTALY INDUSTRIES CORP.

637 VINELAND AVE, LA PUENTE, CA 91746

TEL: 626-968-6330 FAX: 626-968-6333

E-mail: maxcnc@castalymachine.com Website: www.castaly-cncmachine.com

Technical data

1-	Control system	Syntec control system
2-	Spindle	9.0kW (12.8Hp) air cooled spindle 6 000-24 000 rpm
3-	Bed frame	Heavy duty metal welding
4-	Table	Vacuum table 6 zones
5-	Driving system	Leadshine servo drive and motor
6-	Y axis driving system	Helical rack & pinion
7-	X & Z axis driving system	Hiwin ballscrew (Taiwan)
8-	Axis square rail	Hiwin linear square rail (Taiwan)
9-	ATC	Linear 12 tools ISO30, ER32
10-	Inverter	11 kW
11-	Electric parts	Schneider (France)
12-	Limit switch	Omron (Japan)
13-	Electrical wiring	Siemens (Germany)
14-	Control Switch	Moeller (Germany)
15-	Lubrication	Automatic control with filter
16-	Machine working size	408 :51'' (X) x 98'' (Y) x 7-3/4'' (Z) 510 :63'' (X) x 126'' (Y) x 7-3/4'' (Z)
17-	Machine Size (L x W x H)	408 :122'' (X) x 87'' (Y) x 71'' (Z) 510 :99'' (X) x 149'' (Y) x 71 (Z)
18-	Max Travel speed	2 350 IPM
19-	Max working speed	1 100 IPM
20-	Machine Power	3phase, 220V, 52A
21-	Machine net Weight	408: 3 960 lbs 510: 4 480 lbs
22-	Tool length device	Automatic
23-	Vacuum pump	Option
24-	Drill bank	Option 9 tools HSD Drillbank
25-	CAD/CAM software	Option

Feel Free to contact us if you have any technical question or OEM/ODM project, we have solutions for all your needs!



9.0 kW spindle



Syntec 6MB control




Electrical cabinet



Lubrication system



Rigid frame

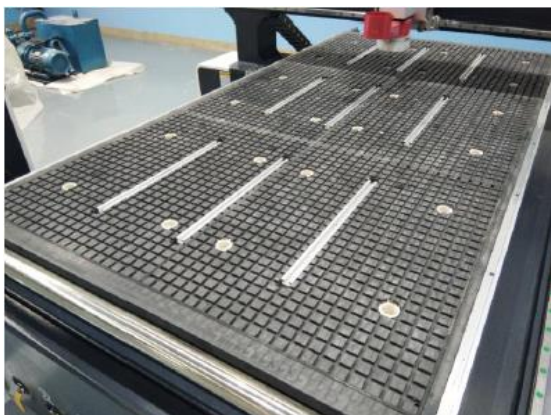

6 zones Vacuum table



12 tools linear ATC